ASSEMBLY INSTRUCTIONS

Make sure you check all contents carefully before discarding packaging material as some parts may be encased in the packing material.

- ·This Gazebo will need 2 or 3 people for assembly.
- ·The assembly process will take approximately 2 hours.
- ·We recommend a set of combination open end wrench set and screw driver set with philip head, slot head, star head and vice grip will be helpful for the assembly of this item.

WARNING:

- 1. Always install the gazebo on level ground utilizing the ground stakes provided for stability.
- 2.Before attaching the canopy, make sure ALL BOLTS are tightened securely.
- 3. During assembly keep children away from the work area and the parts and tools.
- 4. Keep all flame and heat sources away from this gazebo/canopy/tent/fabric.

CAUTION:

This product can not withstand winds or heavy rain. To avoid injury or damage, we recommend that when high winds or heavy rain is forecasted ,please remove the roof until the storm has end.

Gazebo Cleaning & Storage:


- ·Canopy ·Wash with mild liquid soap. Using a sponge. Scrub fabric gently.
 - ·Rinse with water until all soap is removed.
 - ·Drip-dry gazebo in an open position.
- ·Frame ·Wipe clean with damp cloth.
 - ·Use mild soap to wash frame.
 - ·If gazebo is equipped with caps remove caps and drain all remaining water.
 - Dry frame with cloth.
- One year warranty.

ASSEMBLY INSTRUCTION


| ITEM | DESCRIPTION | | QTY | ILLUSTRATION | | | | | |
|------|--------------------------|---------------------|------|--------------|--|------|---------------|---------------|-------|
| А | LEG | | 2PCS | | | | | | |
| В | LEG | | 2PCS | • • • • | | | | | |
| С | LONG CROSS BAR | | 2PCS | | | | | | |
| D | SHORT CROSS BAR | | 2PCS | | | | | | |
| E | ROOF CORNER SUPPORT | | 4PCS | • | | | | | |
| F | ROOF CORNER SUPPORT | | 2PCS | • | | | | | |
| | | | | | | | | | |
| ITEM | DESCRIPTION | ILLUSTRATION | | QTY | | ITEM | DESCRIPTION | ILLUSTRATION | QTY |
| G | ROOF CORNER CONNECTOR | | | 1PCS | | Н | SHELF SUPPORT | 6 0 | 4PCS |
| I | SMALL CANOPY | | | 1PCS | | J | BIG CANOPY | | 1PCS |
| K | GROUND SPIKE | | | 8PCS | | L | BOLT | ∰∭∭) M6*10 | 10PCS |
| М | BOLT | (H)))))))) M6*20 | | 24PCS | | N | BOLT | (<u> </u> | 6PCS |
| 0 | NUT | <u> </u> | | 10PCS | | Р | BRACKET | 60 | 6PCS |
| Q | WRENCH | | | 8PCS | | R | SHELF | | 2PCS |

BBQ Gazebo Assembly Instruction


STEP 1: Attach 4PC bracket (P) to the 4PC legs (A&B) with 4PC bolt (L), do not tighten the bolt until STEP 5.

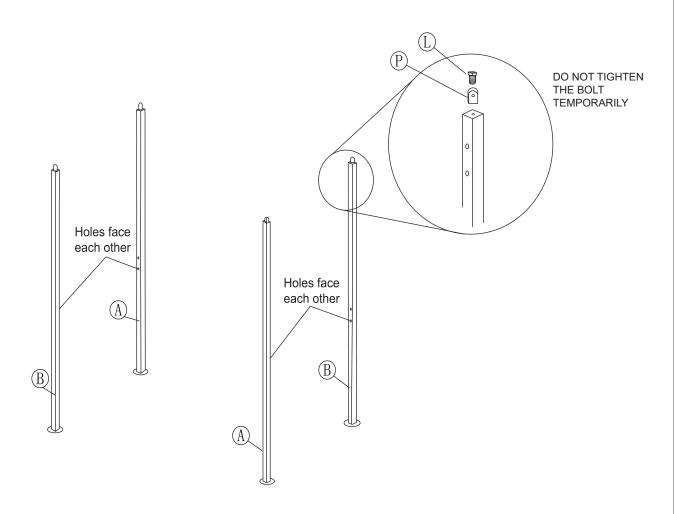


STEP 2: Attach 2PC bracket (P) to the 2PC long cross bar (C) with 2PC bolt (L).

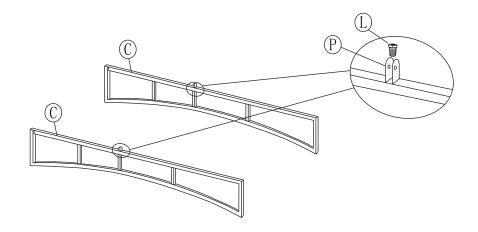


STEP 3: Attach 2PC long cross bar (C) and 2PC short cross bar (D) to the 4 legs with 16PC bolt (M) . Please make sure holes of the legs face each other as shown in the picture.

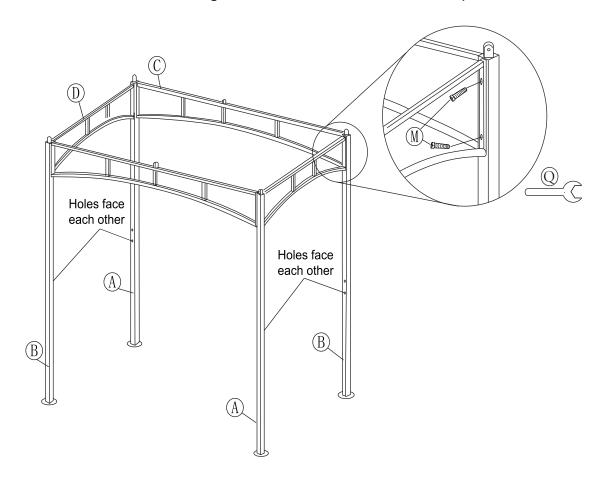


STEP 4: Connect 4PC Roof Corner Support (E) and Roof Corner Connector (G) long tube. Connect 2PC Roof Corner Support (F) and Roof Corner Connector (G) short tube.

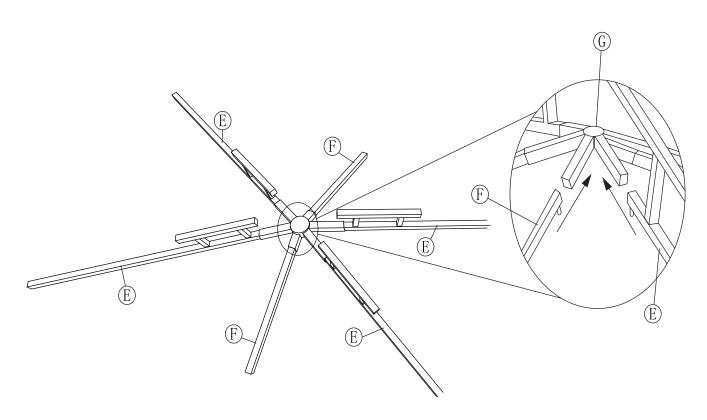


STEP 5: Attach Roof Corner Support (E&F) to bracket (P), and fix it with bolt (N) and nut (O).

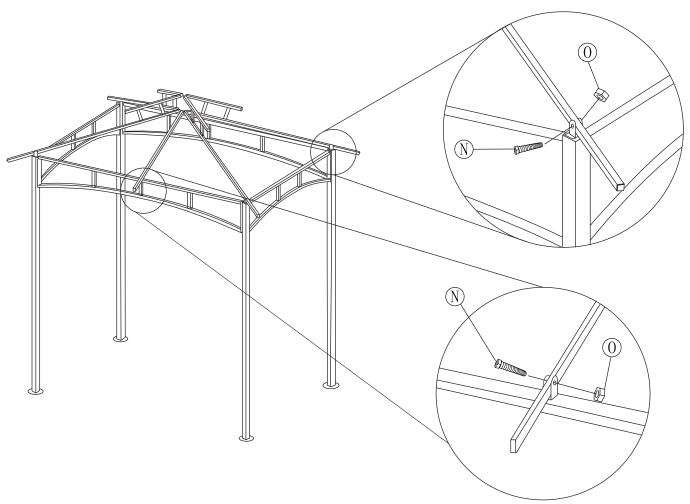

STEP 6: Attach shelf support (H) to the legs (A&B) with bolt (L) . Then attach shelf (R) to the legs (A&B) and shelf support (H) , fix by using bolt (M) and nut (O). Repeat the above step for another shelf.

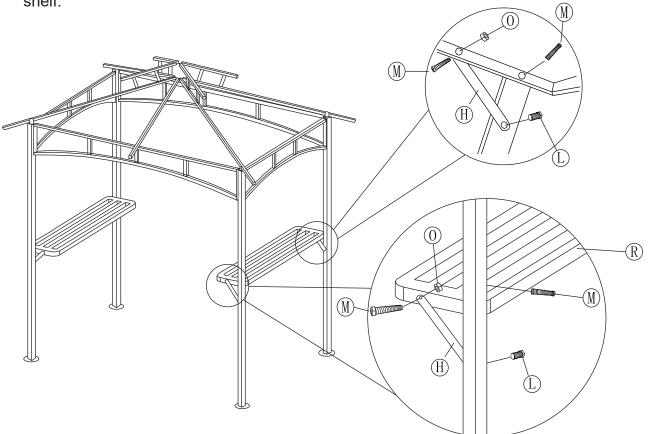

STEP 7: Pull the corner of Roof Cover (I), and insert Roof Corner Support (E) to this corner. Then pull the corner of Roof Cover (J), and insert roof corner support (E&F) to this corner. Then secure the gazebo with the ground spike (K).

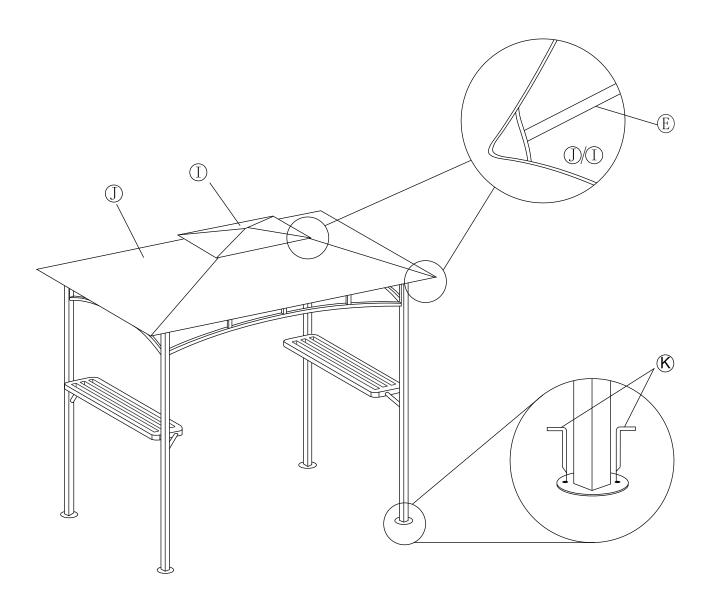

Any questions, assembly or accessories, please contact:

customerservice@e2e-corp.com